


1/2" POJAČANI NASADNI KLJUČ

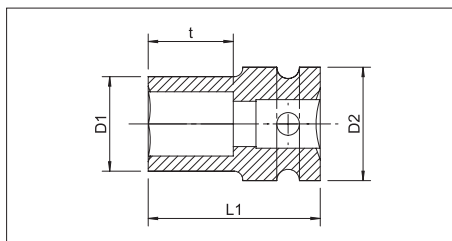

Metrički, kratki


- Za primjenu s električnim, pneumatskim ili udarnim odvijačima
- Norma: DIN 3129, DIN 3121/ISO 1174
- Izvedba: kovani, brunirani
- Prihvat: unutarnji 4-kt 1/2"
- Prihvat alata: 12-kt, metrički
- Geometrija: kratka

Primjena:

Uska mjesta, 12-kutni vijci, posebno Actros

mm	L1 mm	D1 mm	D2 mm	t mm	br. art.	JP/kom.
10	38	17,5	24	10	714 131910	1
12		19,5			714 131912	
13		20,5			714 131913	
17		26	26	12	714 131917	
19		28	28	14	714 131919	
21		30	30		714 131921	
22		32	30		714 131922	

1/2" POJAČANI NASADNI KLJUČ

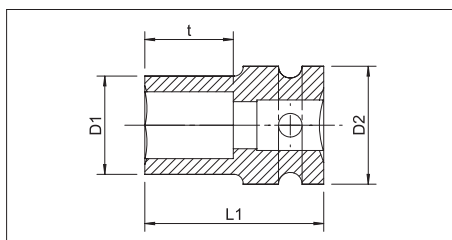

Za vanjske TX vijke

- Za primjenu s električnim ili pneumatskim odvijačima ili udarnim odvijačima
- Norma: DIN 3121/ISO 1174
- Izvedba: kovani, brunirani
- Prihvat: unutarnji 4-kt 1/2"
- Prihvat alata: vanjski TX
- Geometrija: kratka

Veličina	L1 mm	D1 mm	D2 mm	t mm	br. art.	JP/kom.
E10	38	13,5	25	13	715 13510	1
E12		15,5			715 13512	
E14		17,5			715 13514	
E18		21,8	30	11	715 13518	
E24		28,3			715 13524	